


Main Product Characteristics

BV _{DSS}	30V
R _{DS(ON)}	6mΩ
I _D	50A

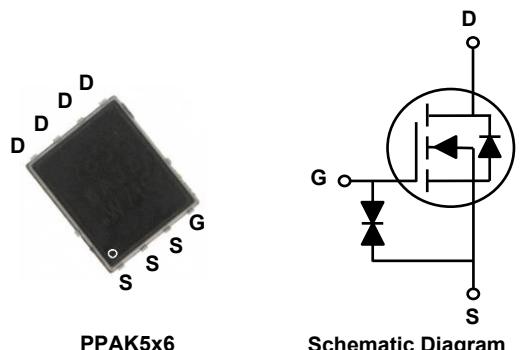

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery
- 1.5KV HBM ESD capability



Description

The GSFP0352 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supplies and a wide variety of other applications.

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V _{DS}	30	V
Gate-Source Voltage	V _{GS}	±20	V
Drain Current-Continuous ($T_c=25^\circ\text{C}$)	I _D	50	A
Drain Current-Continuous ($T_c=100^\circ\text{C}$)		32	
Drain Current-Pulsed ¹	I _{DM}	200	A
Single Pulse Avalanche Energy ²	E _{AS}	45	mJ
Single Pulse Avalanche Current ²	I _{AS}	30	A
Power Dissipation ($T_c=25^\circ\text{C}$)	P _D	27	W
Power Dissipation-Derate above 25°C		0.22	W/°C
Thermal Resistance, Junction-to-Ambient	R _{θJA}	62	°C/W
Thermal Resistance, Junction-to-Case	R _{θJC}	4.58	°C/W
Operating Junction Temperature Range	T _J	-55 To +150	°C
Storage Temperature Range	T _{STG}	-55 To +150	°C

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On / Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	30	-	-	V
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}}=27\text{V}, V_{\text{GS}}=0\text{V}, T_J=25^\circ\text{C}$	-	-	1	μA
		$V_{\text{DS}}=24\text{V}, V_{\text{GS}}=0\text{V}, T_J=85^\circ\text{C}$	-	-	10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	±20	μA
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=20\text{A}$	-	5	6	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=15\text{A}$	-	8	10.5	
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_{\text{D}}=250\mu\text{A}$	1.2	1.6	2.5	V
Forward Transconductance	g_{fs}	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=3\text{A}$	-	6.6	-	S
Dynamic and Switching Characteristics						
Total Gate Charge ^{3,4}	Q_g	$V_{\text{DS}}=15\text{V}, I_{\text{D}}=25\text{A}, V_{\text{GS}}=10\text{V}$	-	13	-	nC
Total Gate Charge ^{3,4}	Q_g	$V_{\text{DS}}=15\text{V}, I_{\text{D}}=25\text{A}, V_{\text{GS}}=4.5\text{V}$	-	6.3	-	
Gate-Source Charge ^{3,4}	Q_{gs}		-	1.1	-	
Gate-Drain Charge ^{3,4}	Q_{gd}		-	2.2	-	
Turn-On Delay Time ^{3,4}	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=15\text{V}, R_{\text{G}}=6\Omega, V_{\text{GS}}=10\text{V}, I_{\text{D}}=25\text{A}$	-	2.5	-	nS
Rise Time ^{3,4}	t_r		-	3	-	
Turn-Off Delay Time ^{3,4}	$t_{\text{d}(\text{off})}$		-	5	-	
Fall Time ^{3,4}	t_f		-	8	-	
Input Capacitance	C_{iss}	$V_{\text{DS}}=15\text{V}, V_{\text{GS}}=0\text{V}, F=1\text{MHz}$	-	680	-	pF
Output Capacitance	C_{oss}		-	507	-	
Reverse Transfer Capacitance	C_{rss}		-	27	-	
Gate Resistance	R_g	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=0\text{V}, F=1\text{MHz}$	-	1.5	-	Ω
Drain-Source Diode Characteristics and Maximum Ratings						
Continuous Source Current	I_s	Force Current	-	-	50	A
Pulsed Source Current	I_{SM}		-	-	100	A
Diode Forward Voltage	V_{SD}	$V_{\text{GS}}=0\text{V}, I_{\text{s}}=1\text{A}, T_J=25^\circ\text{C}$	-	-	1	V

Note :

- Repetitive rating: Pulsed width limited by maximum junction temperature.
- $V_{\text{DD}}=25\text{V}, V_{\text{GS}}=10\text{V}, L=0.1\text{mH}, I_{\text{AS}}=30\text{A}, R_{\text{G}}=25\Omega$, starting $T_J=25^\circ\text{C}$.
- Pulse test: pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
- Essentially independent of operating temperature.

Typical Electrical and Thermal Characteristic Curves

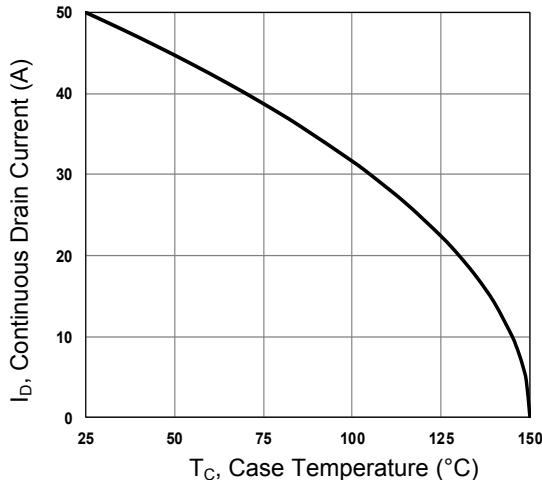


Figure 1. Continuous Drain Current vs. T_c

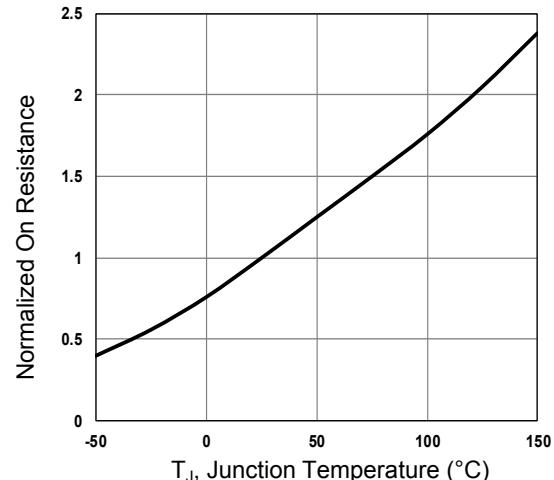


Figure 2. Normalized R_{DSON} vs. T_j

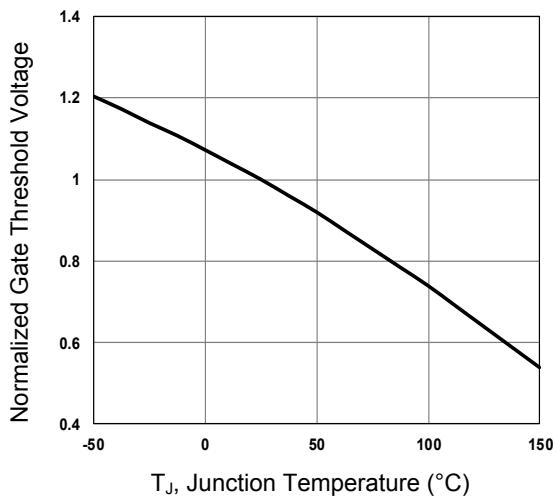


Figure 3. Normalized V_{th} vs. T_j

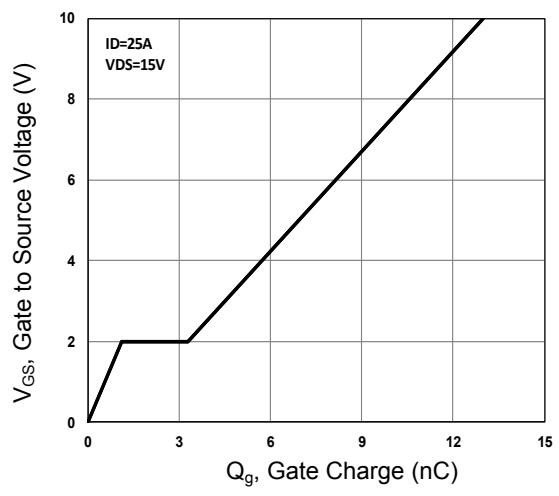


Figure 4. Gate Charge Waveform

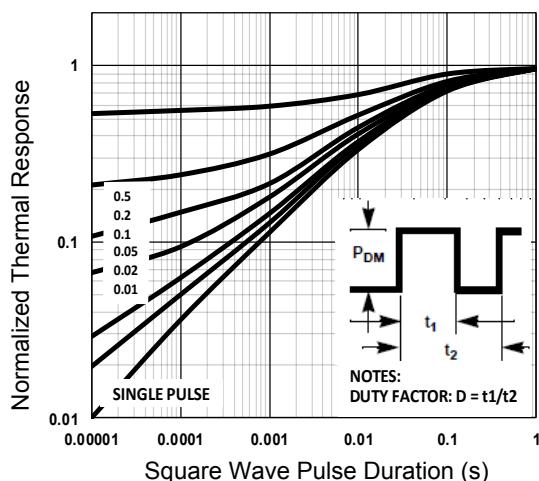


Figure 5. Normalized Transient Impedance

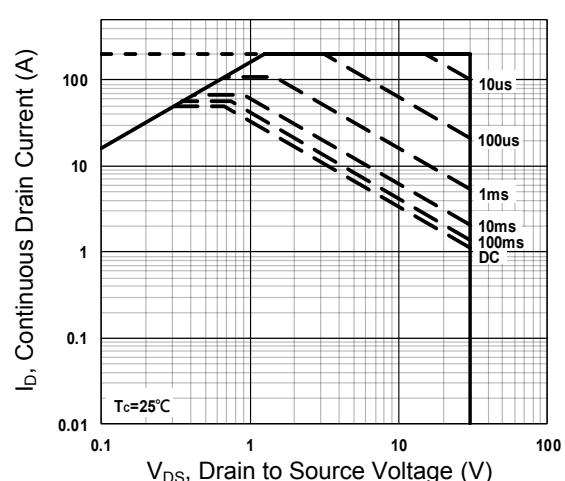


Figure 6. Maximum Safe Operation Area

Typical Electrical and Thermal Characteristic Curves

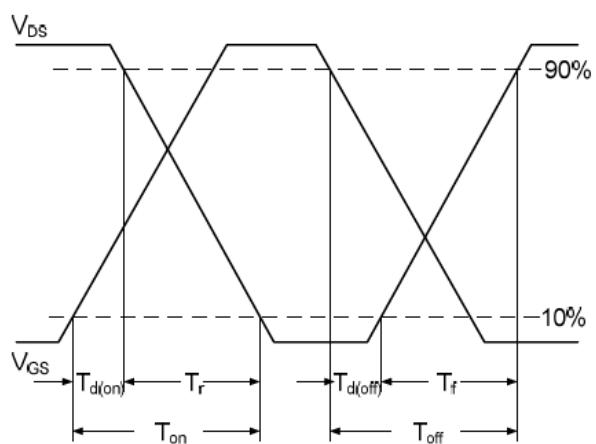


Figure 7. Switching Time Waveform


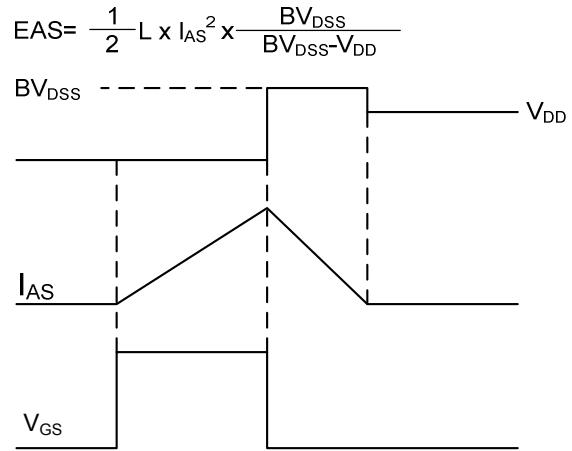


Figure 8. EAS Waveform

Package Outline Dimensions (PPAK5x6)

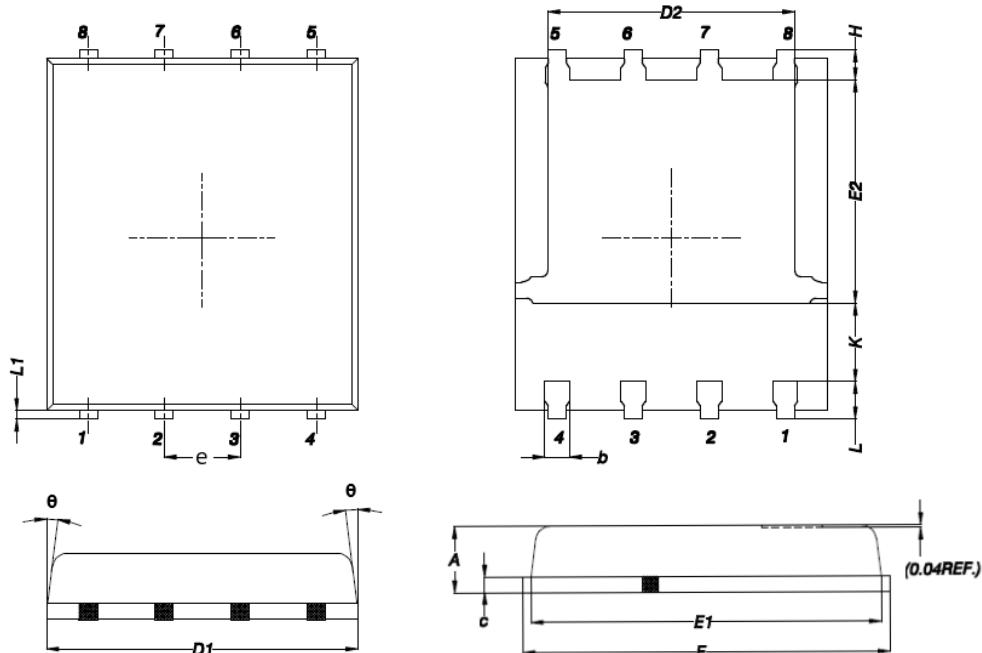

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	0.850	1.200	0.031	0.047
b	0.300	0.510	0.012	0.020
C	0.200	0.300	0.008	0.012
D1	4.800	5.400	0.189	0.212
D2	3.610	4.310	0.142	0.170
E	5.850	6.300	0.230	0.248
E1	5.450	5.960	0.215	0.235
E2	3.300	3.920	0.130	0.154
e	1.270 BSC		0.050 BSC	
H	0.380	0.650	0.015	0.026
K	1.100	-	0.043	-
L	0.380	0.710	0.015	0.028
L1	0.050	0.250	0.002	0.009
θ	0°	12°	0°	12°