



Main Product Characteristics

$V_{(BR)DSS}$	650V
$R_{DS(ON)}$	0.22Ω (max.)
I_D	20A



TO-220F



Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery



Description

The GSJU6520 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supplies and a wide variety of other applications.

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V_{DS}	650	V
Gate-Source Voltage	V_{GS}	± 30	V
Drain Current-Continuous, at Steady-State, ($T_C=25^\circ\text{C}$)	I_D	20	A
Drain Current-Continuous, at Steady-State, ($T_C=100^\circ\text{C}$)		12	
Drain Current-Pulsed	I_{DM}	80	A
Single Pulse Avalanche Energy ¹	E_{AS}	657	mJ
Power Dissipation ($T_C=25^\circ\text{C}$)	P_D	40	W
Power Dissipation – Derate above 25°C		0.32	W/°C
Body Diode Reverse Voltage Slope ²	dv/dt	15	V/ns
MOS dv/dt Ruggedness ³	dv/dt	100	V/ns
Junction-to-Ambient (PCB Mounted, Steady-State)	$R_{\theta JA}$	62.5	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	3.1	°C/W
Operating Junction Temperature Range	T_J	-55 To +150	°C
Storage Temperature Range	T_{STG}	-55 To +150	°C

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On / Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=250\mu\text{A}$	650	-	-	V
Drain-Source Leakage Current	I_{DSS}	$\text{V}_{\text{DS}}=650\text{V}, \text{V}_{\text{GS}}=0\text{V}$	-	-	1	μA
Gate-Source Leakage Current	I_{GSS}	$\text{V}_{\text{GS}}=\pm 30\text{V}, \text{V}_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Static Drain-Source On-Resistance	$\text{R}_{\text{DS}(\text{ON})}$	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=10\text{A}$	-	0.19	0.22	Ω
Gate Threshold Voltage	$\text{V}_{\text{GS}(\text{th})}$	$\text{V}_{\text{GS}}=\text{V}_{\text{DS}}, \text{I}_D=250\mu\text{A}$	2.0	-	4.0	V
Dynamic and Switching Characteristics						
Total Gate Charge ^{4,5}	Q_g	$\text{V}_{\text{DD}}=520\text{V}, \text{I}_D=20\text{A}, \text{V}_{\text{GS}}=10\text{V}$	-	48	-	nC
Gate-Source Charge ^{4,5}	Q_{gs}		-	20	-	
Gate-Drain ("Miller") Charge ^{4,5}	Q_{gd}		-	19	-	
Turn-On Delay Time ^{4,5}	$t_{\text{d}(\text{on})}$	$\text{V}_{\text{DD}}=325\text{V}, \text{R}_G=25\Omega, \text{V}_{\text{GS}}=10\text{V}, \text{I}_D=20\text{A}$	-	32	-	nS
Rise Time ^{4,5}	t_r		-	96	-	
Turn-Off Delay Time ^{4,5}	$t_{\text{d}(\text{off})}$		-	105	-	
Fall Time ^{4,5}	t_f		-	75	-	
Input Capacitance	C_{iss}	$\text{V}_{\text{DS}}=100\text{V}, \text{V}_{\text{GS}}=0\text{V}, \text{F}=1\text{MHz}$	-	1718	-	pF
Output Capacitance	C_{oss}		-	66	-	
Reverse Transfer Capacitance	C_{rss}		-	1.7	-	
Gate Resistance	R_g	$\text{F}=1\text{MHz}$	-	1.3	-	Ω
Drain-Source Diode Characteristics and Maximum Ratings						
Continuous Source Current (Body Diode)	I_s	$T_c=25^\circ\text{C}$, MOSFET symbol showing the integral reverse p-n junction diode.	-	-	20	A
Source Pulse Current	I_{SM}		-	-	80	A
Diode Forward Voltage	V_{SD}	$\text{V}_{\text{GS}}=0\text{V}, I_s=20\text{A}$	-	1.1	1.4	V
Reverse Recovery Time ²	t_{rr}	$\text{V}_{\text{DD}}=50\text{V}, I_F=20\text{A}, dI_F/dt=100\text{A}/\mu\text{s}$	-	330	-	nS
Reverse Recovery Charge ²	Q_{rr}		-	5.7	-	uC

Note:

1. $L=79\text{mH}, I_{AS}=3.8\text{A}, V_{DD}=100\text{V}, R_g=25\Omega$, starting temperature $T_J=25^\circ\text{C}$.
2. $V_{DS}=0-400\text{V}, I_{SD} \leq I_s, T_J=25^\circ\text{C}$.
3. $V_{DS}=0-480\text{V}$.
4. Pulse test: pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
5. Essentially independent of operating temperature.

Typical Electrical and Thermal Characteristic Curves

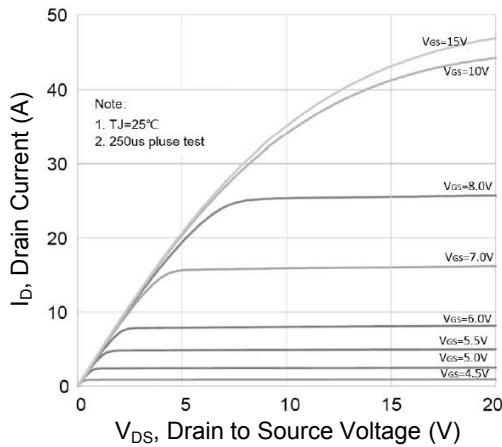


Figure 1. Typical Output Characteristics

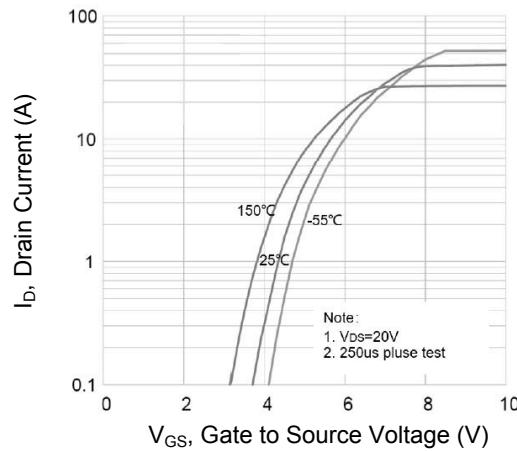


Figure 2. Typical Transfer Characteristics

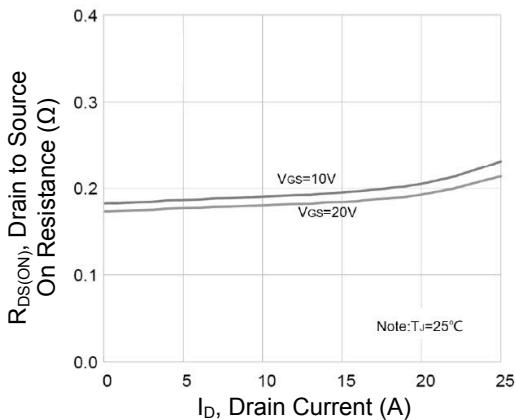


Figure 3. $R_{DS(ON)}$ vs. Drain Current

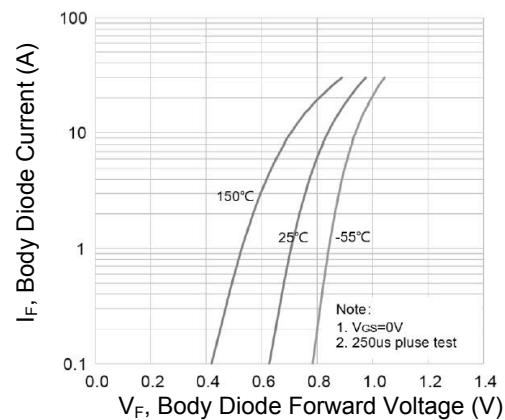


Figure 4. Body Diode Characteristics

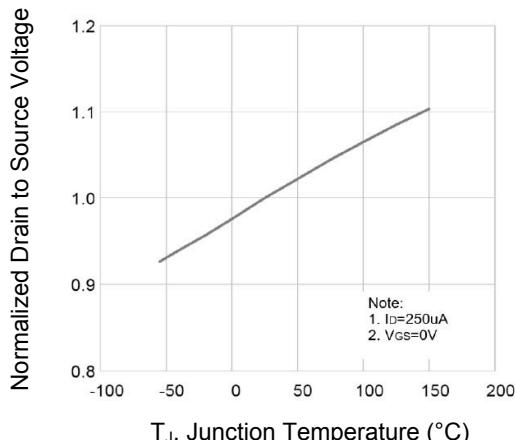


Figure 5. Normalized BV_{DSS} vs. Junction Temperature

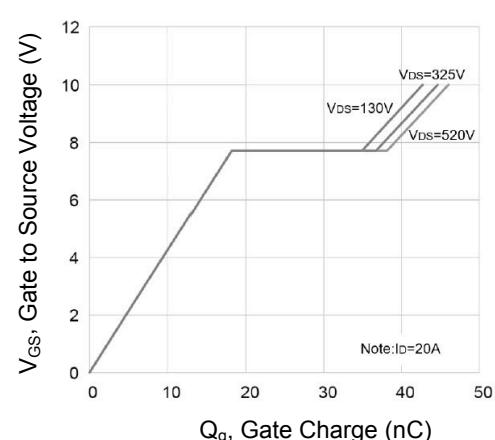


Figure 6. Gate Charge Characteristics

Typical Electrical and Thermal Characteristic Curves

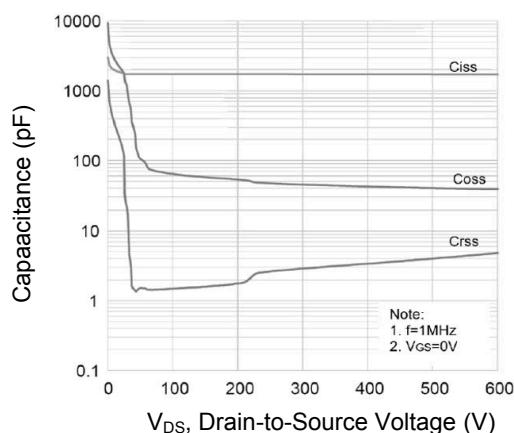


Figure 7. Capacitance Characteristics

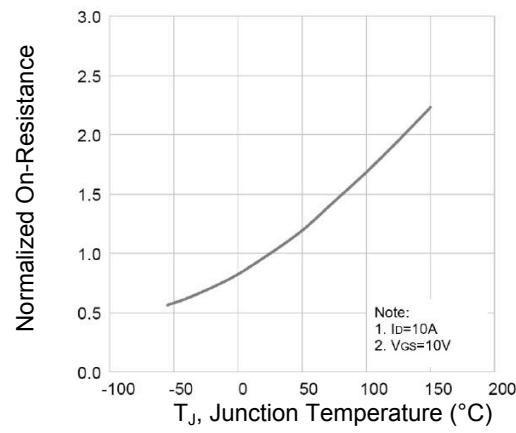


Figure 8. Normalized $R_{DS(ON)}$ vs. T_J


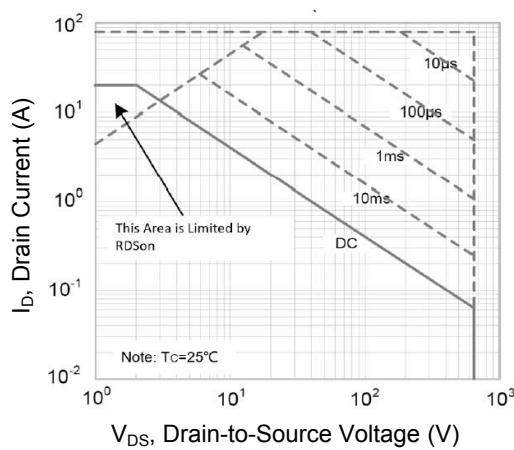


Figure 9. Safe Operation Area

Package Outline Dimensions (TO-220F)

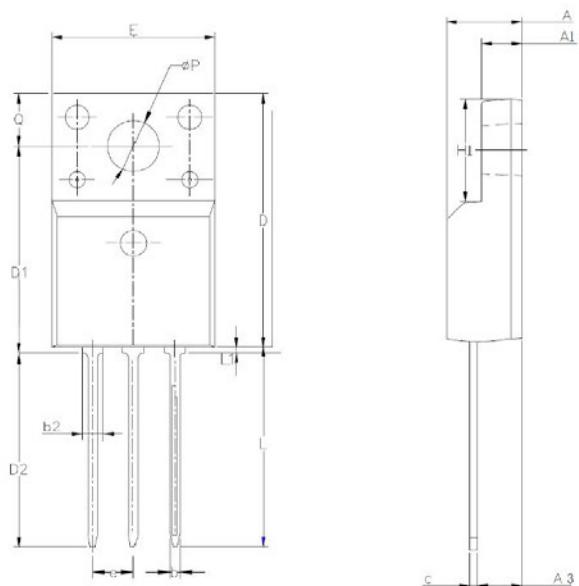

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	4.420	5.020	0.174	0.198
A1	2.300	2.800	0.091	0.110
A3	2.500	3.100	0.098	0.122
b	0.550	0.800	0.022	0.031
b2	-	1.290	-	0.051
c	0.350	0.650	0.014	0.026
D	15.250	16.250	0.600	0.640
D1	12.870	13.270	0.507	0.522
D2	12.280	12.680	0.483	0.500
E	9.730	10.360	0.383	0.408
e	2.540 BSC		0.100 BSC	
H1	6.400	7.000	0.252	0.276
L	12.480	13.480	0.491	0.530
L1	-	0.850	-	0.033
ØP	3.000	3.400	0.118	0.134
Q	3.050	3.550	0.120	0.140