



# MUR440 and MUR460

Ultrafast Plastic Rectifiers  
Reverse Voltage 400 to 600 Volts Forward Current 4.0 Amperes

## Features


- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Ideally suited for use in very high frequency switching power supplies, inverters and as a free wheeling diode
- ◆ Ultrafast recovery time for high efficiency
- ◆ Excellent high temperature switching
- ◆ Glass passivated junction
- ◆ High temperature soldering guaranteed:  
250°C/10seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3Kg) tension



DO-201AD

## Mechanical Data

- ◆ Cases: JEDEC DO-201AD, molded plastic body over passivated chip
- ◆ Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Color band denotes cathode end
- ◆ Mounting position: Any
- ◆ Weight: 0.045 ounce, 1.2 grams

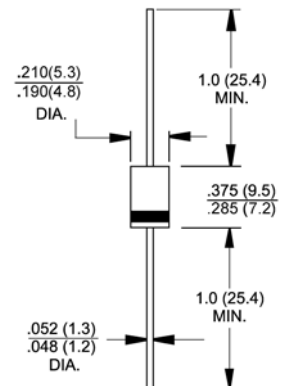

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	MUR440	MUR460	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	400	600	Volts
Working peak reverse voltage	$V_{RWM}$	400	600	Volts
Maximum DC blocking voltage	$V_{DC}$	400	600	Volts
Maximum average forward rectified current (See figure 1)	$I_{F(AV)}$	4.0		Amps
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	125.0		Amps
Maximum instantaneous forward voltage (Note 1)	$V_F$	at 3.0A, $T_J=150^\circ\text{C}$	1.05	Volts
		at 3.0A, $T_J=25^\circ\text{C}$	1.25	
		at 4.0A, $T_J=25^\circ\text{C}$	1.28	
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	$I_R$	$T_J=25^\circ\text{C}$	10.0	$\mu\text{A}$
		$T_J=150^\circ\text{C}$	250	$\mu\text{A}$
Maximum reverse recovery time at $I_F=0.5\text{A}$ , $I_R=1.0\text{A}$ , $I_{FR}=0.25\text{A}$	$t_{rr}$	50		nS
Maximum reverse recovery time at $I_F=1.0\text{A}$ , $di/dt=50\text{A}/\mu\text{s}$ , $V_R=30\text{V}$ , $I_{FR}=10\% I_{RSM}$	$t_{rr}$	75		nS
Maximum forward recovery time at $I_F=1.0\text{A}$ , $di/dt=100\text{A}/\mu\text{s}$ , recovery to 1.0V	$t_{fr}$	50		nS
Typical thermal resistance junction to ambient (Note 2)	$R_{\theta JA}$	28		$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +175		$^\circ\text{C}$

- Notes:**
1. Pulse test:  $t_f=300\mu\text{s}$ , duty cycle < 2%
  2. Lead length = 1/2" on P.C. Board with 1.5" x 1.5" copper surface

# RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

